


VIBRASORB

PD Mounts



Features

- High Deflection
- Load ratings from 20 - 1500kg (colour coded)
- Non-Skid ribbed base
- Can be made in different compounds for special applications.

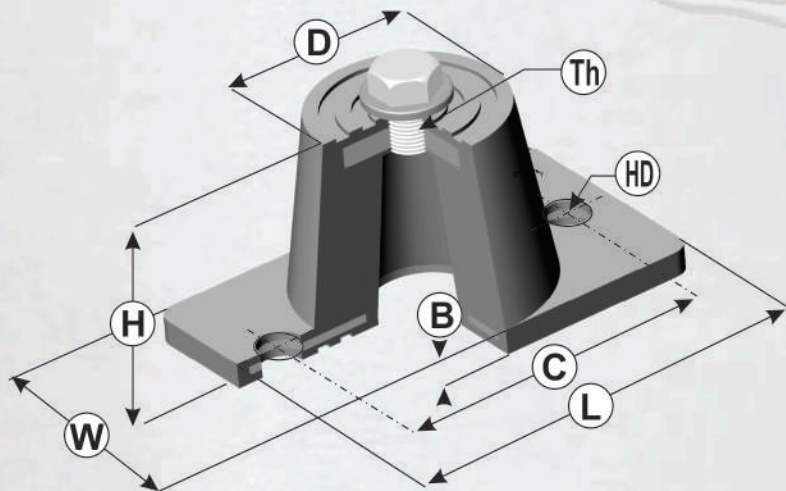

Description:

Our PD Mounts are high deflection mountings which are able to efficiently reduce noise and high frequency vibration from fans, pumps, aircon units and other general rotating machinery.

Load Ratings

Size	Hardness	Load Range (kg)	max deflection (mm)
PD1	40 - Green	20 - 35	5
	50 - Red	30 - 50	
PD2	40 - Green	50 - 100	7
	60 - White	80 - 150	
PD3	40 - Green	70 - 125	10
	50 - Red	110 - 225	
	70 - Yellow	200 - 375	
PD4	50 - Red	300 - 475	10
	70 - Yellow	400 - 750	
PD5	70 - Yellow	750 - 1500	10

Characteristics

- All metals covered by rubber to prevent corrosion
- Top and Base rib design to improve grip
- Specifically manufactured for fans, pumps, air-conditioning units and other general rotating machinery

Dimensions in (mm)

Size	Length L	Width W	Height H	Top Dia D	Thread Th	Base thickness B	Hole Centres HC	Hole dia HD
PD1	80	43	38	30	M8	6	59	10.5
PD2	98	58	48	45	M10	6	76	10.5
PD3	140	83	70	65	M12	6	104	14
PD4	158	100	70	88	M12	7	128	14
PD5	186	130	70	115	M12	8	155	14

JOHANNESBURG (Head Office)

011 908 4616

www.sndsa.co.za

DURBAN
039 315 5306

CAPE TOWN
021 914 4206